


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 30 TOWNSHIP 16 RANGE 3
DATE: 7-26-01 8-29-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County 10-27-98

IN. S.P.C. E ZONE NAD '83
NAME: 16033001
N: 506497.6095(m)
E: 49953.3946(m)

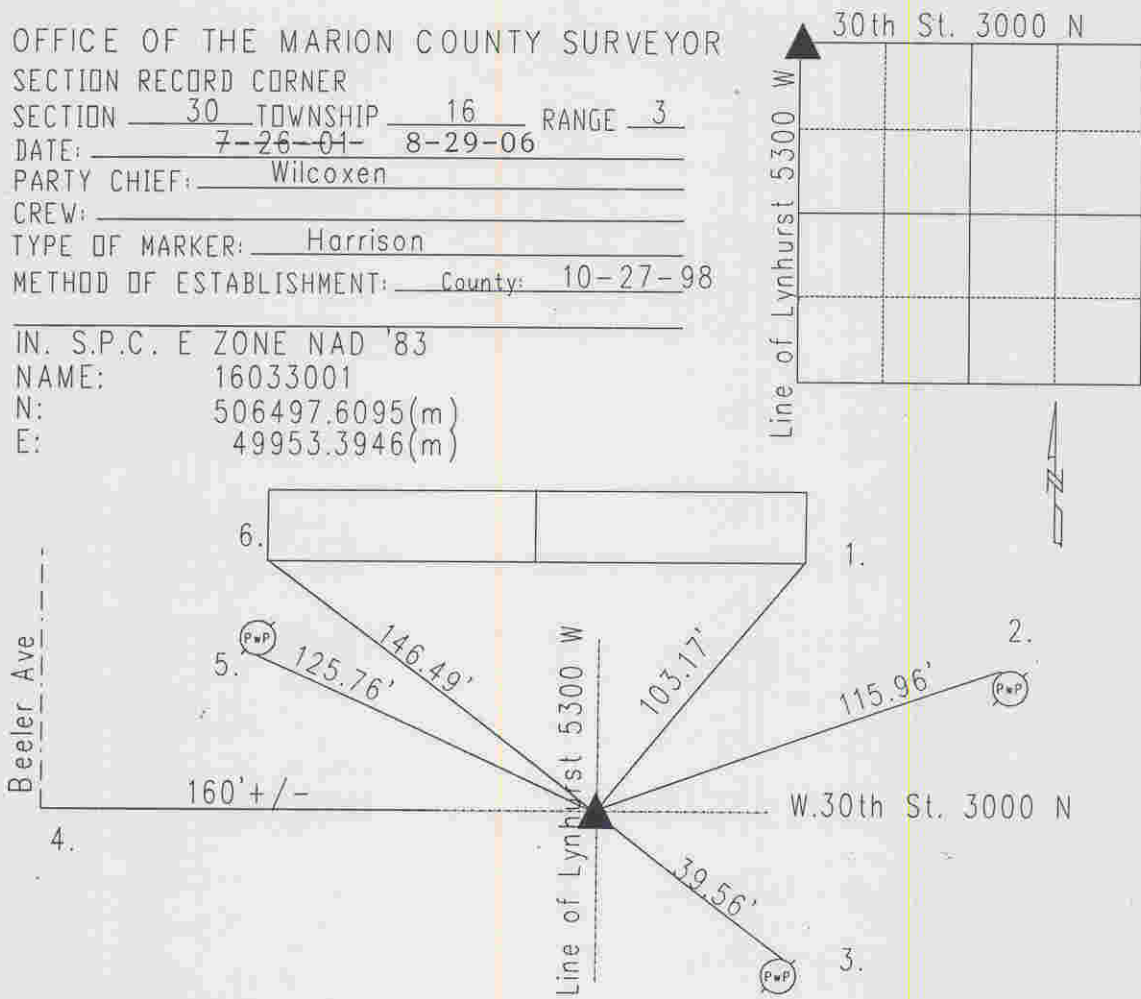

Original post set 1820 by Wm. B. Loughlin with witnesses: 20" elm N 77W 15 links, 8" white ash S 81 E 38 links per Marion County Atlas pg. 7. Survey by H.B. Fatout 5-10-1882 indicates no stone or witnesses per Wayne Township Legal Survey Book pg. 97. Bruer 8-27-79 called a cut 'x' in concrete. Gries 1-14-88 called a copperweld. Kiste 10-27-98 called a copperweld. Excavated by Wilcoxon 7-26-01 and copperweld found 4" down. No other points were found. Harrison set.

16033001

REF.	DISTANCE	DESCRIPTION
1.	103.17'	SE corner of concrete foundation ADDRESS 5302
2.	115.96'	PK nail NW PwP#237-426 A 2"up
3.	39.56'	PK nail NE PwP#24-426 B 2"up
4.	160.'	Due W to approximate C/L of Beeler Ave (5320W.)
5.	125.76'	PK nail S PwP380-425 A 2"up
6.	146.49'	SW corner of foundation ADDRESS 5410